

SAFES

VAULTS AND VAULT DOORS

CATALOGUE 2022



Chubb safes
Trusted the world over.



Trusted the world over, Chubb safes is the oldest brand for safes, vaults and vault doors in the world. Chubb safes solutions are well known and appreciated for their unique combination of robustness, reliability and modern designs.

Having provided high-quality protection solutions for almost two centuries, Chubb safes combines experience with innovation to create trustworthy products for maximum protection against burglary, fire and explosives.

The Chubb safes solutions are rigorously tested by international and independent accreditation bodies to guarantee the best protection available.

Chubb safes
Trusted the world over.


CONTENTS

FINDING YOUR SAFE	5
TEST STANDARDS	6
PRODUCT OVERVIEW	8
LOCKING OPTIONS	9
PRODUCTS	
OPTIONAL FITTINGS	48

ICONS EXPLAINED



DuoForce	10
Senator	11
Consul	12
DuoGuard	13
DuoGuard GII	14
ProGuard	15
Custodian	16
Europa	17
Trident	18
Air Counter Unit	19
Sigma Deposit	20
Omega Deposit	21
Rhino Mk II DT	22
Europa Deposit	23
ProGuard DT	24
Executive	25
DPC	26
DataGuard NT	27
DataPlus	28
Fire File 25"	29
Fire File 31"	30
Lateral Fire File	31
Binder Fire File	32
Ultra Fire file 31"	33
Air	34
AlphaPlus	35
HomeSafe S2 30P	36
Rhino Mk II	37
HomeStar	38
Archive Cabinet	39
ForceGuard	40
Air Hotel	41
Centurion SR	42
Centurion VD	43
Centurion LW-SR	44
Centurion LW-VD	45
Centurion LW-DD	46
ModuleGuard VD	47
ModuleGuard SR	48

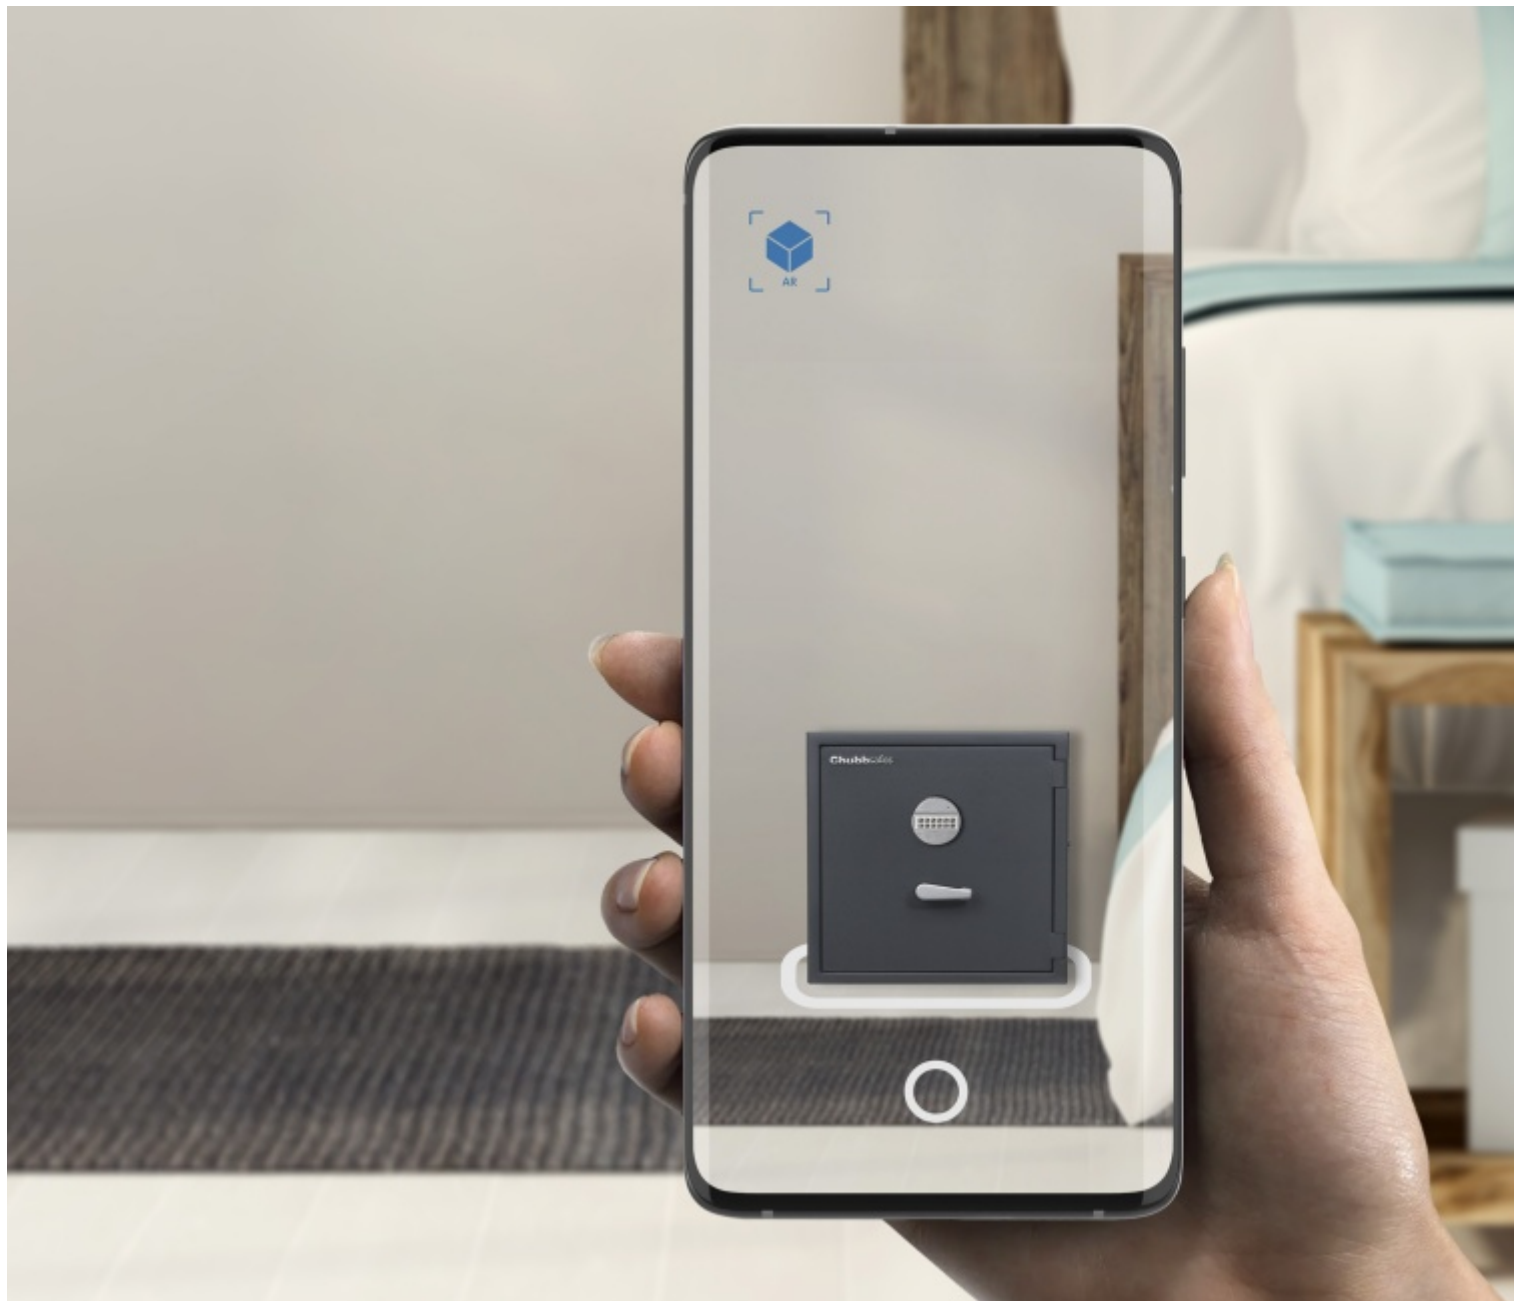

PLACE A SAFE
WHERE YOU ARE
RIGHT NOW!



Scan this QR code with
your smartphone or visit
www.chubbsafes.com

MAKE SECURITY A VIRTUAL PART OF YOUR EVERYDAY LIFE

Try out the new AR functionality at www.chubbsafes.com
and place a safe where you are standing right now!

All you need is a smartphone – no app needs to be installed.
Visit www.chubbsafes.com, select a safe and take the first
step towards making security a part of your everyday life.

WHICH **SAFE** IS RIGHT FOR YOU?

The most important initial question is what you want to protect – cash and valuables, documents or data media?

CASH AND VALUABLES

Choose from the burglary protection range. This includes safes, cabinets, vaults & vault doors, designed to withstand physical attacks in different strengths or Grades. Each Grade represents a particular “cash rating” which is the amount an insurer will cover. The actual amount of cover can vary between insurance companies and country, and may be different to the manufacturer's recommended rating. You should always check what cover your insurance company is prepared to offer.

DOCUMENTS AND DATA MEDIA

Choose from the fire protection range which includes safes and filing cabinets designed to keep documents or data media safe from the effects of a fire.

DOCUMENTS

To survive a fire, documents require protection from temperatures higher than 170°C. Therefore cabinets have to be specifically designed, tested and then certified for this task. Without a credible certification, you cannot be sure that your documents are safe.

DATA MEDIA

The same is valid for data media, except here the cabinet must offer much greater protection due to the sensitivity of the material. If the inside of the cabinet exceeds a mere 50°C, then the information on a CD, DVD or tape will be destroyed.



CERTIFIED STRENGTH

To provide the appropriate level of protection, the products are tested to comply with the latest industry standards. The various certification tests carried out in independent laboratories for burglary or fire protection are conducted by experienced operators armed with plans of the product and a whole range of tools.

FOR BURGLARY PROTECTION, safes and vaults are awarded grades:

- For security cabinets, there are Grades S1 and S2 (EN 11450).
- For safes, vaults and vault doors, they are rated from Grade 0 to Grade XIII (EN 1143-1).
- High security locks are graded according to EN 1300.

During the certification process, door panels of the products, bolt works, locks and handles are tested. The certification tests include an attack program that is devised so that various break-in attempts can be made using a selection of tools. A correlation between tool type and the time for which each one is used can be used to obtain a resistance score (resistance unit). The higher the score, the higher the level of resistance. Based on the results obtained, the safe is given a classification and then listed in a resistance grade.

FOR FIRE PROTECTION, these standards vary according to whether you want to protect paper documents, digital media or other highly sensitive objects. This is because the temperature at which data media (e.g. 50°C) and documents (e.g. 170°C) deteriorate differs according to the item protected:

- In order to fully protect data media, industry standards indicate that products should carry ECB•S EN 1047-1, UL 72 Class 125 or NT Fire 017 60/120 DIS.


The ECB•S and UL tests monitor the internal temperature of the data cabinet until it has completely cooled down during the “soakout” period. Assessing products during this period is essential, since internal temperatures can peak up to six to eight hours after a fire has been extinguished. Such tests ensure that all products are comprehensively tested and, upon passing, will fully protect your data media for the specific time period stated.

- For document protection, all products must have an appropriate industry standard 30-, 60- or 120-minute paper certificate.


UL 72 Class 350, ECB•S EN 1047-1, EN 15659 or NT Fire 017 are acceptable standards for paper document protection.

LEVELS OF RESISTANCE

Alongside extremely strict standards, you will also find a number of others that are less stringent in terms of resistance.

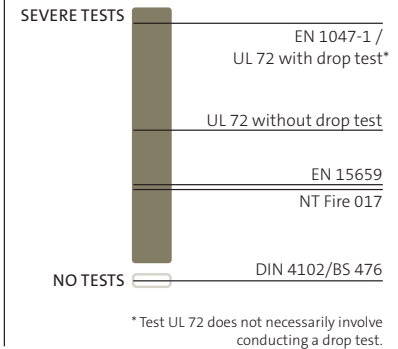

HIGHEST ALLOWED INSIDE TEMPERATURE

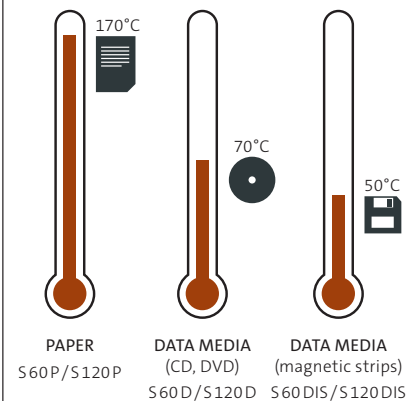

STANDARD IN BRIEF

STANDARDS	TEMPERATURE TEST	DROP TEST	PAPER	DATA MEDIA	COOLING
EN 1047-1	1090°C	9.15 metres	S 60 P (60 min.) / S 120 P (120 min.)	S 60 DIS (60 min.) / S 120 DIS (120 min.)	incl. the cooling period
UL 72	1090°C	9.15 metres (In UL the drop test is optional so always check what is being claimed)	Class 350 (½, 1, 2 hours)	Class 125 (½, 1, 2 hours)	incl. the cooling period
EN 15659	850°C	no	LFS 30 P (30 min.) / LFS 60 P (60 min.)	no application	not tested
NT Fire 017	927°C	no	60 paper (60 min.) / 120 paper (120 min.)	60 diskettes (60 min.) / 120 diskette (120 min.)	not tested
DIN 4102/BS 476	not tested	not tested	not tested	not tested	not tested

EUROPEAN CERTIFICATION FOR SAFES, VAULTS AND VAULT DOORS EXPLAINED

In order to attest to the quality of a certified product, an information plate is adhered to the inside of the product. This provides you with guarantees that the product has been tested and manufactured in an environment that has been checked by the certifying body.

Below is shown the ECB•S label and the details listed on the information plate.

BURGLARY PROTECTION CERTIFICATION

SERIAL NO.

Each product can be identified by a unique serial number. This number is given by the certifying body

YEAR OF MANUFACTURE

The year that the product was manufactured

EN 1143-1/EN 14450

The European standard that the product meets

CERT. MARK. NO.


Certificate number issued by the certifying body

RESISTANCE GRADE

Resistance classes

WEIGHT

The safe's net weight. A 5% tolerance in the net weight indicated is accepted

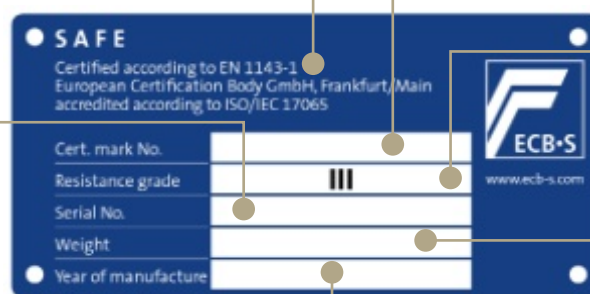

FIRE PROTECTION CERTIFICATION

SERIAL NO.

Each product can be identified by a unique serial number. This number is given by the certifying body

YEAR OF MANUFACTURE

The year that the product was manufactured

EN 1047-1/EN 15659

The European standard that the product meets

CERT. MARK. NO.


Certificate number issued by the certifying body

PROTECTION CLASS

Resistance classes

WEIGHT

The safe's net weight. A 10% tolerance in the net weight indicated is accepted

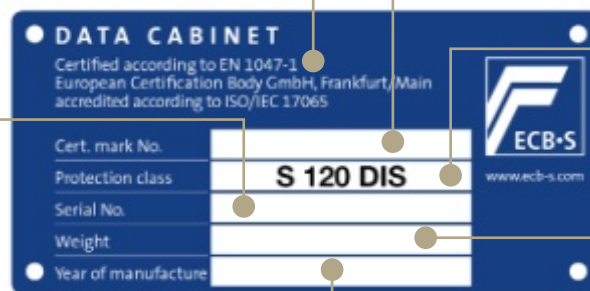

Fire testing is undertaken by independent laboratories with certificates issued by certification authorities. Here are some examples of test institutes and certificates that you may encounter: ECB•S, UL, iBMB, MPA Dresden, Applus RTD, SP, VdS.

FOR MORE DETAILED INFORMATION, contact your insurance company or visit the chubbsafes.com website.

SAFES, VAULTS AND VAULT DOORS **BY CERTIFICATION**

PRODUCT	STANDARD	CLASSIFICATION	CERTIFICATION BODY
BURGLARY PROTECTION			
Air	n/a	n/a	n/a
Air Counter Unit	n/a	n/a	n/a
Air Hotel	n/a	n/a	n/a
Alpha Plus	n/a	n/a	n/a
Centurion Lightweight Door-in-Door	EN 1143-1	Grade V to VI	ECB+S
Centurion Lightweight Strong Room	EN 1143-1	Grade V	ECB+S
Centurion Lightweight Vault Door	EN 1143-1	Grade V to VI	ECB+S
Consul	EN 1143-1	Grade 0 to I	ECB+S
Custodian	EN 1143-1	Grade IV to V	ECB+S
Europa	EN 1143-1	Grade V	ECB+S
Europa Deposit	n/a	n/a	n/a
ForceGuard	n/a	n/a	n/a
HomeStar	n/a	Silver Level	Sold Secure
ModuleGuard Strong Room	EN 1143-1	Grade II to IV	ECB+S
ModuleGuard Vault Door	EN 1143-1	Grade II to IV	ECB+S
Omega Deposit	n/a	n/a	n/a
ProGuard	EN 1143-1	Grade III	ECB+S
ProGuard DT	EN 1143-2	Grade DI to DII	ECB+S
Rhino Mk II DT	n/a	n/a	n/a
Sigma Deposit	n/a	n/a	n/a
FIRE PROTECTION			
Archive Cabinet	n/a	n/a	n/a
Binder Fire File	UL 72 Class 350	2h Fire	UL
CS 300	EN 1047-1	S 60 P to S 120 P	ECB+S
DataGuard NT	NT Fire 017	120 Diskette	SP
DPC	UL 72 Class 350	2h Fire	UL
Executive	NT Fire 017 & UL 72 Class 350	60 Paper & 1h Fire	SP & UL
Fire File 25"	UL 72 Class 350	1h Fire	UL
Fire File 31"	UL 72 Class 350	1h to 2h Fire	UL
Lateral Fire File	UL 72 Class 350	1h Fire	UL
Ultra Fire File 31"	UL 72 Class 350	1h to 2h Fire	UL
COMBINED BURGLARY & FIRE PROTECTION			
DataPlus	EN 14450 & EN 1047-1 & UL 72 Class 125	Level S2 & S 120 DIS & 2h Fire	ECB+S & UL
DuoForce	EN 1143-1 & NT Fire 017	Grade III & 60 Paper	ECB+S
DuoGuard	EN 1143-1 & EN 1047-1	Grade 0 to I & S 60 P	ECB+S
DuoGuard GII	EN 1143-1 & NT Fire 017	Grade II & 90 Paper	ECB+S & SP
HomeSafe S2 30P	EN 14450 & EN 15659	Level S2 & LFS 30 P	ECB+S
Rhino Mk II	EN 14450 & EN 15659	Level S2 & LFS 60 P	ECB+S
Rhino Mk II DT	n/a	n/a	n/a
Senator	EN 1143-1 & EN 15659	Grade I & LFS 30 P	ECB+S
COMBINED BURGLARY & EXPLOSION PROTECTION			
Centurion Strong Room	EN 1143-1	Grade V to XII, IX (CD) to XII (CD) & Grade IX EX to XII EX	ECB+S
Centurion Vault Door	EN 1143-1	Grade V to XIII, VIII (CD) to XIII (CD) & Grade V EX to XIII EX	ECB+S
COMBINED BURGLARY, FIRE & EXPLOSION PROTECTION			
Trident	EN 1143-1 & NT Fire 017	Grade III to VI & Grades III EX to VI EX & 60 Paper	ECB+S & SP

LOCKING OPTIONS

Depending on the range, you can customise your product with a different lock. Thus you can benefit from a comprehensive lock offering that includes the latest industry solutions, which offer a wide range of features. So whether it be the “mechanical combination” lock or an electronic solution, you can be sure to have a lock that will meet your security needs. Below the key terms associated with the range of locks.

DEFINITIONS

KEY LOCK: A manual key-operated lock.

MECHANICAL COMBINATION: A mechanical keyless dial lock with a changeable combination.

ELECTRONIC LOCK: An electronically-operated keypad lock with a changeable combination.

MANAGER MODE: Allows one user to control the functions of other combination holders.

NUMBER OF USERS: The number of users able to program in their own access code.

DURESS FEATURE: An alarm engineer can link the lock into a monitored alarm system. Then, using a given procedure, the lock can be operated, the safe opened and a silent signal given to the monitoring station that this is being done under duress.

TIME DELAY: This feature allows for a pre-set delay between operating the lock and being able to open the safe. The operation may vary between lock types.

TIME LOCK: Time lock allows the user to set periods during which the lock may be operated, e.g. during business hours only. The options available will vary between locks.

AUDIT TRAIL: The lock is able to give a report (it will vary in detail from model to model) of usage and may show times of operation, codes used and operations performed.

DUAL CONTROL: Allows two users to enter their details before any operation can be performed.

PLANNING, DELIVERY & INSTALLATION

Once you have selected a product, you can also chose the installation survey option. We will then agree with you on a flexible installation schedule. The flexibility of the installation process is evidence of Gunnebo's commitment to ensuring the cost- and time-efficient completion of your purchase.

Our products are delivered and installed by trained Gunnebo installers. Whatever the delivery environment (e.g. large bank or small office), you can be assured that the installers will take the greatest care. We are also focused on making sure the service on offer is achievable to the highest standards of workmanship, and is promptly completed within the contracted timescales.



MODEL SHOWN: DUOFORCE M-160

DUOFORCE

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary resistance in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade III. Meets the demands of all Insurance Companies when it comes to burglary resistance.
- Tested by an independent, ISO 17025 accredited laboratory according to the NT Fire 017 – 60 Paper standard with certification managed by ECB•S. Protects your vital documents from the effects of fire.
- All sizes can be trusted to protect their contents not just against unauthorised forced burglary attack but also against the extreme temperatures experienced during fire.
- Supplied with one key lock as standard with the option of a factory fitted electronic lock or optional two locks. This gives the flexibility to customise how DuoForce can be secured and operated
- DuoForce Grade III introduces a new small size, Model 40; ideally suited to Residential clients requiring the safe storage of jewellery and valuables or needing to comply with local legislation concerning gun storage. DuoForce can be installed almost anywhere
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-40	537	451	525	412	326	327	43	200	1
M-65	565	537	582	440	412	384	69	260	1
M-120	725	635	617	600	510	419	127	380	2
M-160	910	635	617	785	510	419	167	465	2
M-225	1185	635	617	1060	510	419	226	600	2

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

External dimensions exclude handle and hinge projections. In line with certification, weights can vary by +/- 5%.



MODEL SHOWN: SENATOR M-65

SENATOR

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Dual Certification: Burglary (EN 1143-1) Grade I and Fire (EN 15659, LFS 30 P).
- Certified locks: EN 1300 certified Class A key lock or Class B high-security electronic lock.
- Four models available: 32, 46, 63 or 190 litres.
- Secure bolt work and traditional heavy weight design.
- Enhanced design: removable door for easy installation and a reduced overall weight by 15%.
- Fittings: each safe is supplied with one shelf as standard.
- Attractive appearance: single-colour door and body in dark grey (RAL 7016).
- Ideal for the home or office.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-30	370	500	403	290	420	263	32	121
M-45	500	500	403	420	420	263	46	150
M-65	650	500	403	570	420	263	63	183
M-190	862	654	563	782	574	423	190	329

Dimensions exclude handle and hinge projections.



MODEL SHOWN: CONSUL M-15

CONSUL

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Market leading light weight allows for easier installation.
- Burglary protection in accordance with EN 1143-1, as certified by ECB-S for Grade 0 and I.
- Composite door made from 10mm steel with an overall thickness of 35mm.
- The body is 45 mm overall, comprising the inner and outer steel walls, the space between which is filled with a multi-material burglary resistant barrier.
- 25mm diameter steel bolts secure the door, three operating horizontally and two each vertically upwards and downwards.
- Recessed door & concealed internal hinges which give a smooth finish & prevent areas of attack.
- Model 25 & above has the ability to store A4 Binders.
- Consul comes in two lock options:
 - Double-bitted 8 lever, EN 1300 Class A certified key lock to which two 90mm keys are supplied.
 - A user-programmable, EN 1300 Class B electronic lock capable of accepting two differing user codes and a time-delay function.
- The safe is prepared & anchoring kit is supplied to allow the Consul range to be securely base- or rear-fixed to resist unauthorised removal once installed.

PRODUCT SPECIFICATIONS

Grade 0/Grade I

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-15	280/-	370/-	350/-	190/-	280/-	250/-	13/-	40/-
M-20	-/330	-/450	-/330	-/240	-/360	-/230	-/20	-/50
M-25	330	450	400	240	360	300	26	54/59
M-40	450	450	400	360	360	300	39	67/72
M-50	570	450	400	480	360	300	52	81/86
M-65	690	450	400	600	360	300	65	94/100
M-80	-/850	-/450	-/400	-/760	-/360	-/300	-/82	-/117


Dimensions exclude handle and hinge projections.



MODEL SHOWN: DUOGUARD M-445

DUOGUARD

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance with EN 1143-1, as certified by ECB•S for Grades 0 and I.
- Approved by ECB•S in accordance with EN 1047-1 in class S 60 P for one hour's fire protection of paper documents.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.
- The three-way boltwork is made from solid steel bolts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts. (manganese-coated steel plates for Grade 0 and T200X carbide-clad steel plates for Grade I).

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-40	435	500	456	335	400	295	40	100
M-60	530	500	521	430	400	360	62	123
M-115	690	600	561	590	500	386	114	175
M-150	875	600	561	775	500	386	150	212
M-205	1150	600	561	1050	500	386	203	264
M-290	1600	600	561	1500	500	386	290	337
M-355	1600	675	585	1500	575	410	354	374
M-445	1850	675	615	1750	575	440	443	436

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

Projection of hinge* (20mm) and projection of handle** (65mm) not included. *** Width excluding shelf racking strips. Racking reduces the internal width by 15mm



MODEL SHOWN: DUOGUARD GII M-115

DUOGUARD GII

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB•S for Grade II.
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP's certification rules for fire resisting storage cabinets, SPCR 002.
- The three-way boltwork is made from solid steel bolts.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-65	578	526	547	452	400	360	65	265
M-115	716	626	587	590	500	386	114	379
M-150	901	626	587	775	500	386	150	456
M-205	1176	626	587	1050	500	386	203	582
M-290	1626	626	587	1500	500	386	290	748
M-355	1626	701	611	1500	575	410	354	829
M-445	1876	701	641	1750	575	440	443	970

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

Projection of hinge*(20mm) and projection of handle** (65mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 15mm



PROGUARD

BURGLARY-RESISTANT PROTECTION



- Burglary protection in accordance with the European EN 1143-1 standard, as certified by ECB-S for Grade III.
- ProGuard's special barrier material provides certified burglary protection whilst also keeping the total weight of the safe down. Less weight means lower transportation costs and greater installation options.
- A higher level of protection can be offered in a safe with reduced wall thickness and increased interior capacity.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, ProGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts.
- Either a mechanical key lock or a high-security electronic lock can be used as the primary lock option. At least one EN 1300 Grade B lock must be fitted as standard.
- Every model can be customised with a range of internal fittings to maximise storage capacity. NOTE: Brackets need to be ordered for each fitting
- ProGuard has a modern design with an ergonomic soft-touch handle.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-65	530	500	521	440	410	359	65	208
M-120	690	600	561	600	510	396	121	320
M-160	875	600	561	785	510	396	159	386
M-215	1150	600	561	1060	510	396	214	481
M-305	1600	600	561	1510	510	396	305	636
M-365	1295	785	620	1205	695	530	363	685
M-370	1600	675	585	1510	585	420	371	701
M-465	1850	675	615	1760	585	450	463	827

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

External dimensions exclude handle and hinge projections.



MODEL SHOWN: CUSTODIAN M-595

CUSTODIAN

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Well-designed to fit into an office environment, such as retail shop, bank branch or any small or medium office.
- Developed with convenience in mind, Custodian safes are practical and easy-to-use.
- Ergonomic handle, soft-touch handle.
- Sleek design with elegant RAL 7016 for the body colour and light RAL 7040 grey for the interior fittings.
- Leading-edge GRAVITON barrier material to ensure excellent burglary protection.
- Perfectly suited to add an additional high-layer security to protect your most valuable belongings, Custodian complies and is certified with the strictest requirements for quality and burglary resistance according to EN 1143-1 for Grades IV and V.
- Six models available – 111, 168, 210, 308, 416 and 596 litres.
- As a standard, Custodian is equipped with two security key locks that you can choose among a list of Class B locks approved in accordance with EN 1300. Electronic lock options increase the level of security and prevent unauthorised access to the safe.
- Convenient selection of interior fittings: shelf, suspension files and lockable drawer.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg) Gr. IV / Gr. V
M-110	790	730	560	620	560	320	111	549 / 553
M-170	920	730	640	750	560	400	168	681 / 688
M-210	920	730	740	750	560	500	210	760 / 767
M-310	1270	730	740	1100	560	500	308	985 / 999
M-415	1470	810	740	1300	640	500	416	1201 / 1217
M-595	1850	880	740	1680	710	500	596	1558 / 1575

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49


Projection of handle (56mm) not included in external depth. **Width excluding shelf racking strips. Racking reduces the internal width by 20mm



MODEL SHOWN: EUROPA M-715

EUROPA

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Professional high security safe designed to protect cash and valuables up to the highest certified resistance level.
- The Europa is certified by ECB•S in accordance with the stringent European standard, EN 1143-1, Grade V.
- Six models available: 140–715 litres.
- Fitted with 2 x EN 1300 certified Mauer key locks as standard.
- A choice of locking options are available at additional costs.
- Each safe can be equipped with high quality fittings to maximize storage requirements.
- Europa Grade V is available with a front or rear facing drawer deposit.
- Base fixing is standard on all sizes.
- Light grey finish (RAL 9002).

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Depth incl. Handle & Hinge (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-140	718	668	663	720	588	538	444	140	580
M-210	1018	668	663	720	888	538	444	212	770
M-320	1208	668	773	830	1078	538	554	322	980
M-400	1468	668	773	830	1338	538	554	400	1150
M-570	1796	903	663	720	1666	773	444	572	1520
M-715	1796	903	773	830	1666	773	554	715	1680


Dimensions exclude handle and hinge projections.



MODEL SHOWN: TRIDENT M-1115

TRIDENT

BURGLARY, FIRE & EXPLOSION-RESISTANT PROTECTION



KEY FEATURES

- The Trident range is independently certified to cover three types of risk:
 - Burglary protection in Grades III–VI.
 - Certified by ECB•S in accordance with the stringent European standard, EN 1143-1.
 - Fire protection for documents for up to one hour. Certified NT Fire 017 – 60 Paper by SP.
- Protection against explosives in Grades III–VI EX. Certified by ECB•S in accordance with the stringent European standard, EN 1143-1.
- Eight models for each grade, ranging from 111 to 1117 litres in capacity.
- Range of interior fittings includes shelf, shelf for hanging files, extendable lockable drawer and lockable compartment.
- Wide choice of key locks, combination locks or electronic locks.
- Ergonomically designed to allow for full access to the safe's contents when the door is opened 90°.
- Model 595 can be fitted with up to two columns of safe deposit lockers, model 905 with three and model 1115 with four.
- Available with the door hung on the right or the left.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg) Gr III	Net Weight (kg) Gr IV	Net Weight (kg) Gr V	Net Weight (kg) Gr VI	No. of Doors
M-110	790	730	560	620	560	320	111	540	560	595	635	1
M-170	920	730	640	750	560	400	168	670	695	740	790	1
M-210	920	730	740	750	560	500	210	745	775	825	880	1
M-310	1270	730	740	1100	560	500	308	970	1005	1075	1150	1
M-415	1470	810	740	1300	640	500	416	1180	1225	1310	1400	1
M-595	1850	880	740	1680	710	500	596	1530	1590	1695	1810	1
M-905	1850	1250	740	1680	1080	500	907	1990	2060	2195	2350	2
M-1115	1850	1500	740	1680	1330	500	1117	2295	2380	2535	2710	2

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

*Projection of hinge (25mm) not included. **Projection of handle (65mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 20mm



AIR COUNTER UNIT



BURGLARY PROTECTION FOR BANKNOTES

KEY FEATURES

- Mounted under the counter to securely store and protect banknotes.
- Easy-to-reach deposit slot.
- Stores up to 350 banknotes.
- Two key locks – one to open storage unit and one to release from counter for easier emptying.
- Solid sheet steel construction.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Net Weight (kg)	Capacity (number of notes)
M-350	235	105	190	2.4	350

Dimensions exclude handle and hinge projections.



MODEL SHOWN: SIGMA DEPOSIT M-30

SIGMA DEPOSIT

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Laser-cut door made of 8 mm plate steel.
- Body made from 3 mm steel.
- 25mm diameter steel locking bolts.
- Shelf supplied in model 50.
- Sigma Free Standing Deposit Safes come with two lock options:
 - Double-bitted 8-lever key lock.
 - A programmable electronic lock (available for M-40 and M-50).
- An anchoring kit is supplied so the safe can be securely base- or rear-fixed, preventing unauthorised removal once installed.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-30	305	375	350	299	369	289	32	27
M-40	375	375	350	369	369	289	39	33
M-50	475	375	350	469	369	289	50	38

Dimensions exclude handle and hinge projections. Deposit Slot measures 170mm wide x 16mm high.



MODEL SHOWN: OMEGA DEPOSIT M-50

OMEGA DEPOSIT

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Protects organisations from opportunist attacks.
- Ideal for retail outlets operating remotely from central areas and in multi-shift or out-of-hours environments where key holders are not always available.
- Securely holds cash without the need for the safes to be opened.
- Ensures that large quantities of money do not accumulate in the cash till.
- Door is made from 10mm steel.
- Body is made from 6mm steel.
- 20mm diameter steel bolts secure the door.
- Door bolts operate in three directions.
- An anti-fishing device prevents deposits from being removed once deposited into the deposit chute.
- Shelf supplied with model 50.
- Omega Deposit comes with three lock options:
 - Double-bitted 8-lever key lock.
 - A programmable multi-user electronic lock with optional dual control.
 - Electronic lock complete with a double bitted, emergency override key.
- An anchoring kit is supplied so the safe can be securely base- or rear-fixed, preventing unauthorised removal once installed.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-25	455	340	380	212	328	308	24	54
M-50	698	340	380	455	328	308	48	75

Dimensions exclude handle and hinge projections. Deposit opening measures 80mm high x 265mm wide x 220mm deep.



MODEL SHOWN: RHINO MK II DT M-75

RHINO MK II DT



BURGLARY & FIRE-RESISTANT PROTECTION

KEY FEATURES

- Designed for retail and commercial use.
- 65mm barrier thickness made of a high-density monolithic casting contained within inner and outer steel casings.
- Solid composite 35mm thick main door is combined with additional protection plates to protect crucial locking areas. Solid steel 28.5 mm diameter moving bolts attach the door to the body, while fixed "anti-heeling" bolts on the door's rear edge protect the hinge side.
- Deposit drawer with solid 10mm steel plate front combined with an internal anti-fishing mechanism to secure all items deposited.
- Main door secured by EN 1300 Class A primary locks which can be single lock, be it a key lock, manual combination or electronic lock depending upon individual requirements. For additional security, a second lock is possible.
- Drawer deposit unit secured by a single EN 1300-certified Class A lock.
- Two security fixing bolts to ensure it can be firmly fixed to the floor when installed.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-40	654	500	501	270	370	320	40	256
M-55	854	500	501	470	370	320	56	330
M-75	1004	500	501	620	370	320	73	353
M-130	1004	630	601	620	500	420	130	453
M-180	1234	630	601	850	500	420	179	533

Dimensions exclude handle and hinge projections.



MODEL SHOWN: EUROPA DEPOSIT M-180

EUROPA DEPOSIT



BURGLARY-RESISTANT PROTECTION

KEY FEATURES

- High quality deposit safe constructed from modern high specification materials.
- Deposit feature allows multiple users to constantly deposit cash and valuables securely whilst the main body of the safe remains locked.
- Can be customised with various locking options to suit your requirements.
- Optional internal fittings available: retaining shelf and retaining cupboard.
- Deposit drawer is secured by a double bitted key lock.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Volume** (litres)	Weight (kg)	No. of Standard Key Locks
M-60, GI	882	528	603	460	360	360	60	525	1
M-115, GI	972	668	663	550	500	420	116	694	1
M-180, GI	1272	668	663	850	500	420	180	852	1
M-115, GIII	972	668	663	550	500	420	116	754	2
M-180, GIII	1272	668	663	850	500	420	180	918	2
M-140, CV	972	668	663	588	538	444	140	798	2
M-210, CV	1272	668	663	888	538	444	212	1052	2

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49


*Projection of handle (56mm) not included. **Internal volume does not include allowance for anti-fishing devices



MODEL SHOWN: PROGUARD DT M-45

PROGUARD DT

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Certified, tested and approved in accordance with the European EN 1143-2 standard, in Grades DI and DII.
- EN 1143-2 certified meaning that insurance ratings are not affected by the additional deposit function.
- Built using the same technology as the ProGuard, which is certified in accordance with the European EN 1143-1 standard for Grade II.
- Constructed using a new composite material designed for strength and reduction in total weight, keeping transportation and installation costs to a minimum.
- Solid steel three-way boltwork.
- Anti-fishing device to prevent anyone reaching the contents through the drawer.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to resist burglary attempts.
- A Class A mechanical key lock or a Class B electronic lock, approved in accordance with EN 1300, available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access.
- Drawer trap fitted with a Class A key lock.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Net Weight (kg) Gr I	Net Weight (kg) Gr II	Capacity* (litres)	Drawer Width (mm)	Drawer Depth (mm)
M-45	687	500	521	314	400	360	162	302	45	350	230
M-90	847	600	561	474	500	386	218	426	91	450	230
M-125	1052	600	561	659	500	386	242	499	127	450	230
M-180	1307	600	561	934	500	386	290	602	180	450	230


Dimensions exclude handle and hinge projections. * Useable volume below deposit and anti-fishing device.



MODEL SHOWN: EXECUTIVE M-40

EXECUTIVE

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Fire can strike anywhere – the office or the home. Executive Cabinets provide peace of mind: in the event of a fire breaking out, you can be sure that your paper work can be recovered in a usable condition.
- Ideal for storing essential documents such as wills, property deeds, contracts, insurance policies and many more.
- Certified by both SP (NT Fire 017 – 60 Paper) and UL (UL Class 350 1hr) for 60 minutes' fire resistance.
- Overall body thickness of 50mm, comprising an inner and outer steel body containing a specially formulated fire-resistant solid barrier material.
- Models come with a choice of two lock options – A cylinder lock utilising a secure flat profile key.
- Overall door thickness of 66mm.
- Programmable and user-friendly electronic lock.
- An anchoring kit is supplied which allows the safe to be securely base-fixed, preventing unauthorised removal.
- Comes with internal fittings as standard, meaning that the unit is ready for use as soon as it is received.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Trays	No. of Shelves
M-15	300	390	320	210	310	215	14	25	1	0
M-25	345	425	450	240	320	320	25	45	1	0
M-40	525	410	450	415	305	320	41	57	1	1
M-70	670	550	510	515	395	340	71	120	0	2

Dimensions exclude handle and hinge projections.



DPC

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- High capacity storage solution with fire protection, ideal for office environments such as banks and financial institutions.
- Certified by Underwriter's Laboratories according to UL 72 Class 350 for up to 120 minutes fire protection.
- Automatic mechanism to ensure bolts are in place and able to resist fire whenever the door is closed.
- Interlocking door system on double door models to prevent the cabinet from being left open.
- Available in six high-capacity sizes from 160 to 670 litres.
- EN 1300 Class A certified key lock fitted as standard.
- Dual locking or single electronic or manual combination locks available at additional costs.
- Anchoring kit to fix the safe on the floor and prevent from unauthorised removal available on request.
- Shelf/shelves supplied as standard.
- Optional internal fittings available including pull out file frames and lockable drawers and cupboards.
- RAL 7035 body & RAL 7016 facia panel.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width* (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width*** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves	No. of Doors
M-160	859	759	605	700	600	382	160	235	1	1
M-240	1209	759	605	1050	600	382	240	315	2	1
M-400L	1209	1160	605	1050	1000	382	401	500	2	2
M-320	1559	759	605	1400	600	382	321	395	3	1
M-400P	1909	759	605	1750	600	382	401	470	4	1
M-670	1909	1160	605	1750	1000	382	670	650	4	2

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

*Projection of hinge (27mm) not included. **Projection of handle (54mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 10mm



MODEL SHOWN: DATAGUARD NT M-130

DATAGUARD NT

FIRE-RESISTANT DATA MEDIA PROTECTION



KEY FEATURES

- Certified NT Fire 017 – 120 Diskette for two-hour protection of data media from fire.
- Single-door safe with no insert required – maximising internal capacity and up to 60% more storage space than other safes in the same class.
- User-friendly, slam-action door. When shut, provides full fire protection without needing to be locked.
- Adjustable shelving and drawer units supplied as standard.
- Available in four models, ranging from 30 to 128 litres.
- Choice of key or electronic locking.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Volume (litres)	Net Weight (kg)	Number of shelves	Number of drawers
M-30	530	546	566	280	346	306	30	145	1	0
M-50	700	546	566	450	346	306	48	190	1	1
M-90	1025	546	590	775	346	330	89	263	1	2
M-130	1025	702	590	775	502	330	128	330	1	2

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49


External heights and depths include plinth and handle projection. Internal heights and widths are also equal to the clear opening measurements.



MODEL SHOWN: DATAPLUS M-110

DATAPLUS

FIRE-RESISTANT DATA MEDIA PROTECTION



KEY FEATURES

- Easy slam action emergency closing in event of a fire.
- Generous capacity.
- High-quality media protection.
- Two-hour data media protection label. Tested to the highest international standards, UL 72 and EN 1047-1. DataPlus is certified as Class 125 2hrs with drop test by UL. EN Norm is certified by ECB•S in class S 120 DIS for fire resistance.
- Burglary protection in accordance with European norm EN 14450 and certified by ECB•S in security class S2.
- Easy to transport and install.
- Low weight ratio due to new advanced fire protection barrier material.
- Ability to customise by using internal fittings to optimise your storage capacity.
- Ability to base fix to the floor for effective prevention of physical removal.
- Removable front plate allows useage of a pallet loader for more efficient installation, reducing costs to the customer.
- The cabinet is fitted with a key lock as standard. However, you may require the monitoring of access to your sensitive data and therefore we have a series of electronic locks ranging from basic locking to more sophisticated audit trails.
- The cabinet is an attractive light grey which fits in well in most office interiors.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth** (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight* (kg)
M-110	911	746	780	565	490	400	111	315
M-165	1191	746	780	845	490	400	167	390
M-220	1471	746	780	1125	490	400	221	490
M-315	1941	746	780	1595	490	400	313	640
M-555	1941	1036	830	1570	780	450	556	860

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

*Weight refers to an empty cabinet. **Gross measurement inc. 60mm for handle which can be removed for installation.



MODEL SHOWN: FIRE FILE 25" M-210

FIRE FILE 25"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified for one hour's fire protection of documents in accordance with UL Standard 72, Class 350 Endurance.
- Maximised capacity that users can take full advantage of for their storage requirements.
- Chubb Safes' Fire File 25" is available in two- or four-drawer versions.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection: they just have to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Lighter weight construction which means smoother transportation and installation.
- All models fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Chubb Safes' Fire File 25" is manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Drawers
M-105	784	551	635	290	387	460	104	164	2
M-210	1510	551	635	290	387	460	208	291	4



FIRE FILE 31"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified according with UL standard 72 in Class 350 Endurance for both 1 hour and 2 hour duration.
- Available in two-, three- or four-drawer versions.
- On the two-hour certified models, each drawer is fire-protected. Even if one of the drawers is accidentally left open, the other closed drawers are still protected by the built in fire resistance partitions.
- Easy-to-operate day catch to secure the drawers when closed. Units do not have to be locked to provide fire protection but just to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Lighter weight construction which means smoother transportation and installation.
- Fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Drawer Height (mm)	Drawer Width (mm)	Drawer Depth (mm)	Capacity (litres)	Net Weight (kg) 1h / 2h	No. of Drawers
M-135	784	551	779	290	387	604	136	194 / 197	2
M-205	1147	551	779	290	387	604	204	268 / 273	3
M-270	1510	551	779	290	387	604	272	321 / 328	4



MODEL SHOWN: LATERAL FIRE FILE M-360

LATERAL FIRE FILE

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified by UL Underwriters Laboratories) to Class 350 Endurance 1 hour in accordance with Standard 72.
- Perfectly designed for today's modern offices, it sits closer to the wall for marginally more filing than traditional large filing cabinets, offering exceptional functionality and optimised storage.
- Maximised storage capacity with 3 or 4 drawers so users can fully meet their storage requirements.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection: they simply need to be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Low-weight for reduced transportation and installation costs, and lighter floor loads.
- All models fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Drawer Height (mm)	Drawer Width (mm)	Drawer Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Drawers
M-270	1147	964	586	290	800	387	270	328	3
M-360	1510	964	586	290	800	387	359	411	4



MODEL SHOWN: BINDER FIRE FILE M-160

BINDER FIRE FILE

FIRE-RESISTANT DOCUMENT PROTECTION




KEY FEATURES

- Certified UL Class 350 Endurance protection by UL for up to two hours.
- Maximised storage capacity that allows users to gain full advantage for their storage requirements. Available with 3 or 4 drawers and each drawer holds up to 40 A4 DIN 33mm binders, hence 120 and 160 binders in the three drawer and four drawer versions respectively. By comparison, a standard free standing cabinet with five levels of storage each of 1m length can only hold 150 such binders. Thus the Chubb Safes Binder Fire Files are the perfect storage solution for the congested offices.
- Insulation between drawers means each drawer's contents are protected in an event of fire if one drawer is left open.
- Easy operable day catch to secure the drawers when closed. Units do not have to be locked to provide fire protection but just be pushed closed.
- High-quality steel sliders to ensure comfortable operation and full drawer access.
- Low-weight cabinets for reduced transportation and installation costs, and lighter floor loads.
- All models fitted with high-security locks as standard.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Drawer Height (mm)	Drawer Width (mm)	Drawer Depth (mm)	Net Weight (kg)	Capacity (A4 Binders)	No. of Drawers
M-120	1276	801	836	333	637	660	402	120	3
M-160	1682	801	836	333	637	660	495	160	4

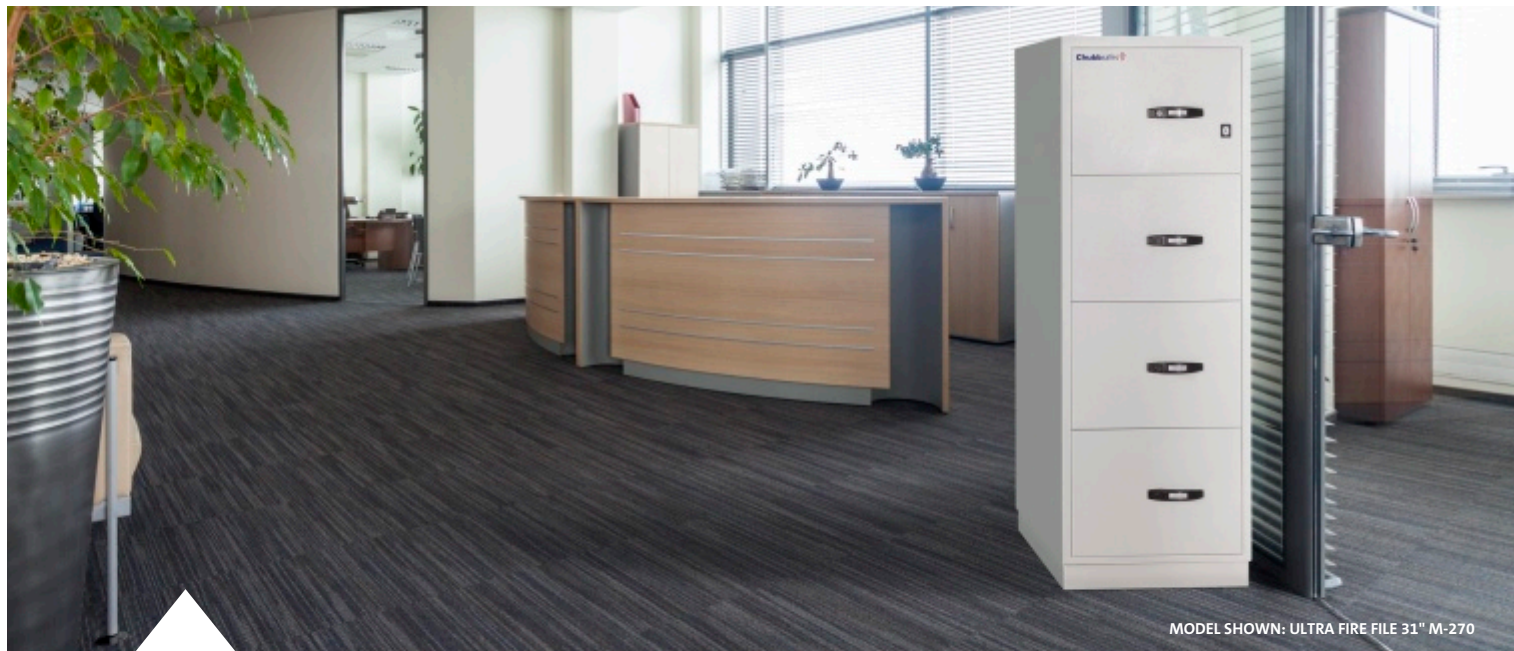

MODEL SHOWN: ULTRA FIRE FILE 31" M-270

ULTRA FIRE FILE 31"

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Certified in accordance with UL Standard 72 in Class 350 Endurance and Impact for both 1 hour and 2 hour duration.
- A shock absorbing plinth provides maximum impact absorption in the event of a floor collapse in a building fire.
- In two-hour certified models, each drawer is individually protected from fire. Even if one of the drawers is accidentally left open, the other closed drawers are still protected.
- Maximised capacity for optimized storage.
- Extended drawers give full access.
- It is available in two-, three- or four-drawer versions.
- Easy-to-operate day catch to secure the drawers when closed.
- Units do not have to be locked to provide fire protection but just to be pushed closed.
- Lighter weight construction, means easier transportation and installation.
- Fitted with high-security locks as standard.
- Light Grey RAL 7035, powder-coated finish and modern design which blends nicely into any office environment.
- Manufactured in accordance with ISO 9001 for quality management systems and ISO 14001 for environmental management systems.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Drawer Height (mm)	Drawer Width (mm)	Drawer Depth (mm)	Capacity (liters)	Net Weight (kg) 1h / 2h	No. of Drawers
M-135	869	551	779	290	387	604	136	201 / 204	2
M-205	1222	551	779	290	387	604	204	275 / 280	3
M-270	1585	551	779	290	387	604	272	328 / 335	4



MODEL SHOWN: AIR M-10

AIR

BURGLARY PROTECTION FOR YOUR VALUABLES



KEY FEATURES

- Compact safe for the home, hotel room or office.
- Three models available: 9-, 16- and 24-litres capacities. The largest is designed to accommodate most laptop computers.
- Choice of locking options: available with a double-bitted key lock or an electronic lock with a programmable code.
- Emergency key override facility for the electronic lock should battery power ever fail.
- Patented “anti-bump” technology which affords the electronic lock protection against impact attacks.
- Tamper-evident keypad.
- Ready for base and for rear fixing, supplied with four expansion anchors.
- Inner base carpet.
- Key hooks included on all electronic models.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-10	200	310	200	190	300	150	9	6	0
M-15	250	350	250	240	340	200	16	9	1
M-25	200	430	350	190	420	300	24	11	0

* In electronic models, add 20mm to allow for keypad projection.



MODEL SHOWN: ALPHAPLUS M-65

ALPHAPLUS

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Double-skinned safe for securing cash, jewellery and valuables around the home or at the office.
- Filled with a fire-retardant mineral wool.
- Can be easily installed in the home without specialised tools.
- Four models available ranging from just 3- to 64-litre capacity.
- Choice of locking options: available with a double-bitted key lock or a touch-screen electronic lock with programmable code.
- Audible anti-tamper alarm installed on all electronic locking models.
- Internal LED lighting on all electronic locking models.
- Electronic models all feature motorised open/closing.
- External emergency power connection should battery power fail.
- Emergency key override facility in the unlikely event of total electronic failure.
- Tamper-evident keypad.
- Ready for base and or rear fixing, supplied with four expansion anchors.
- Inner base carpet.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-05	180	310	205	110	240	115	3	12	1
M-15	270	350	345	200	280	255	14	22	1
M-30	320	440	395	250	370	305	28	32	1
M-65	610	460	395	540	390	305	64	53	1

Dimensions exclude handle and hinge projections. * In electronic models, add 25mm to allow for keypad projection.



MODEL SHOWN: HOMESAFE S2 30P M-50

HOMESAFE S2 30P

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Combined fire and burglary protection in one safe.
- EN 14450 certified by ECB•S to level S2 burglary protection.
- EN 15659 certified by ECB•S for 30-minutes' fire protection for documents.
- Choice of 6 models: from 11- to 91-litre capacity.
- Choice of locking options in all models: EN 1300 certified double-bitted key lock or EN 1300 certified electronic lock.
- Dual base fixing holes, supplied with two concrete anchor bolts.
- Ideal safe for protecting cash and valuable items, as well as passports, title deeds and other important documents in the home and office.
- The safe door is secured using the new revolutionary "V" bolt system. The design of the locking bolts helps maintain door integrity both when under physical attack and during a fire.
- The safe is prepared & anchoring kit is supplied to allow the HomeSafe S2 30P range to be securely base- or rear-fixed to resist unauthorised removal once installed.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-10	300	360	300	210	270	191	11	24	1
M-20	300	445	390	210	355	281	21	32	1
M-35	450	445	390	360	355	281	36	42	1
M-50	600	445	390	510	355	281	51	53	1
M-70	800	445	390	710	355	281	71	65	2
M-90	1000	445	390	910	355	281	91	78	2

Hinges project 20mm beyond the depth given above. In standard electronic models, the overall projection increases to 30mm.



MODEL SHOWN: RHINO MK II M-180

RHINO MK II

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES

- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubb safes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed “anti-heeling” bolts on both front and rear edges protect the door from prying attack.
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable.
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- Rhino Mk II has been tested in accordance with EN 15659, and is certified to level LFS 60 P by ECB•S giving 1 hour fire protection.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Volume (litres)	Net Weight** (kg)
M-30	400	500	502	270	370	325	32	158
M-55	600	500	502	470	370	325	57	213
M-75	750	500	502	620	370	325	75	255
M-130	750	630	602	620	500	425	132	341
M-180	980	630	602	850	500	425	181	421

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

* Handle projection is 56mm. ** In line with certification, weights can vary by +/- 5%



MODEL SHOWN: HOMESTAR M-15

HOMESTAR

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Suitable for the storage of valuables such as jewellery, cameras and other valuable items.
- Certified by Sold Secure to Domestic Safes Silver Level.
- Electronic lock with external emergency power connection.
- LED internal light.
- Base or rear fixing available.
- 6mm steel door and 3mm steel body.
- Three sizes available.
- One removable shelf as standard.
- Flock lining on shelf.
- Anti-tamper alarm.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width** (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-15	250	350	250	244	344	200	17	17	1
M-30***	200	450	400	194	444	350	30	24	1
M-55	400	400	400	394	394	350	54	32	1

*Projection of electronic lock (15mm) not included **Width excluding shelf supports. Shelf supports reduce the internal width by 30mm ***For Laptop



MODEL SHOWN: ARCHIVE CABINET M-450

ARCHIVE CABINET

FIRE-RESISTANT DOCUMENT PROTECTION



KEY FEATURES

- Archive Cabinet has a steel, double-wall construction insulated with special fire-resistant barrier material.
- Available in four models with a generous storage capacity ranging from 325 to 880 litres.
- Secured by three-way boltwork, locking at the top, bottom and side of the door.
- EN 1300 Class A certified key lock fitted as standard.
- A wide range of flexible fittings available to suit all types of storage requirements, including removable shelves, extendable file frames for A4 or Folio files and a lockable compartment.
- Anchor points in the base allow the cabinet to be fixed to the floor.
- All cabinets have a light-grey, powder-coated finish, suitable for any office space.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. Of Shelves
M-325	1500	700	550	1290	594	430	325	95	3
M-450	1950	700	550	1780	594	430	450	120	4
M-640	1950	950	550	1780	844	430	640	150	4
M-880	1950	1260	550	1780	1154	430	880	200	4

SPECIFICATIONS FOR **OPTIONAL FITTINGS** ARE AVAILABLE ON PAGE 49

*Projection of handle (50mm) not included.



MODEL SHOWN: FORCEGUARD M-920

FORCEGUARD

BURGLARY-RESISTANT PROTECTION



KEY FEATURES

- Available in four models, from 236 to 920 litres, with double doors on models M-535–M-920.
- Single-wall body and door made from 3mm solid steel. Doors have a total thickness of 52mm and open to 180°.
- Secured by three-way boltwork, locking at the top, bottom and side of the door. All bolts are chrome-plated and 20mm in diameter.
- Doors also fitted with relocking device for additional protection against attempted forced entry.
- Key lock (Class A), combination lock (class B) or electronic lock (class B) fitted as standard. All locks approved in accordance with the European EN 1300 standard.
- All models equipped with removable shelves designed to accommodate hanging files.
- Anchor points in the base allow the cabinet to be fixed to the floor.
- All cabinets have a light-grey, powder-coated finish, suitable for any office space (RAL 7035).

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)	No. of Doors	No. of Shelves	Rows of Hanging Files	Capacity Hanging Files
M-235	1000	600	450	975	575	400	236	95	1	2	3	1.74
M-535	1500	900	450	1475	875	400	534	140	2	3	4	3.52
M-680	1900	900	450	1875	875	400	680	225	2	4	6	5.28
M-920	1900	1220	450	1875	1195	400	920	275	2	4	6	7.20

*Projection of handle (50mm) not included



AIR HOTEL

BURGLARY PROTECTION FOR YOUR VALUABLES



KEY FEATURES

- Compact safe for hotel rooms, student accommodation or other locations with frequent occupancy turnover.
- Steel door and body with dual, plated steel moving boltwork.
- User-friendly electronic lock.
- Authorised control and access via electronic lock or hand-held programming unit.

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-25	200	430	350	190	420	300	24	12

*Lock projection (10mm) not included.



CENTURION SR

BURGLARY & EXPLOSION-RESISTANT STRONG ROOMS




KEY FEATURES

- Centurion vaults are available in grades V–XII. All grades have been approved to provide resistance against explosives and grades IX–XII offer additional protection against diamond crown drill bits.
- Every grade of Centurion vault has been independently tested by ECB•S and awarded the EN 1143-1 certification for burglary resistance.
- The vault rooms are constructed using lightweight modular panels, making assembly, disassembly and expansion of a room both quick and easy.
- Reduced wall thickness maximises use of the available space.
- An innovative, VdS-approved ventilation system provides optimum climate control.
- Every panel is fitted with an upper and lower cable duct.
- A range of reinforcement structures can be built into the vault room panels to offer additional protection against mechanical and thermal tools.
- The exterior of the vault can be finished with plaster or clad with wood or metal panels.

PRODUCT SPECIFICATIONS

	Thickness (mm)	Weight kg/m ²
Grade V (EX)	75/80/80LW/85EX	255/265/175/280
Grade VI (EX)	75/80/85EX	255/265/280
Grade VII (EX)	85	280
Grade VIII (EX)	100	320
Grade IX (CD, EX)	125	400
Grade X (CD, EX)	150	470
Grade XI (CD, EX)	220	660
Grade XII (CD, EX)	280	830

CD: denotes protection against diamond core drill bits.

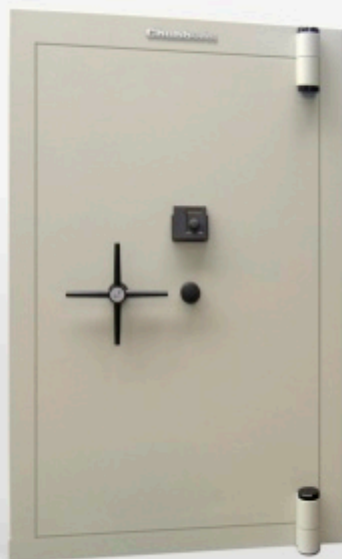

CENTURION VD

BURGLARY-RESISTANT VAULT DOORS



KEY FEATURES

- Certified protection against burglary (certified by ECB•S) for Grades V to XIII.
- Models from Grade VIII to XIII provide resistance against powerful diamond-core drill bits (certified by CD classification).
- Explosives protection (EX) is available upon request from Grades V to XIII.
- Door frames are armoured to provide extra protection.
- The doors are designed to accommodate an alarm system.
- A new design that is thinner and lighter.
- A stainless steel door frame for a stylish construction.
- Developed to accommodate an alarm system.
- Colour finish in RAL 7016 Antracite Grey or RAL 7035 Light Grey as a standard.
- Ergonomic for user friendly operation.
- Optional grill gate (accessible via a high security lock that can be opened manually or automatically) available.

PRODUCT SPECIFICATIONS

Model	Door Depth (mm)	Clearance Opening Height (mm)	Clearance Width (mm)	Weight (kg)	Number of bolts	Number of locks	Lock class
Grade V (EX)	100 (130)	1960	900	1500 (1600)	6	2	B + B
Grade VI (EX)	100 (130)	1960	900	1500 (1600)	6	2	C + C
Grade VII (EX)	100 (130)	1960	900	1500 (1600)	6	2	C + C
Grade VIII (EX, CD)	130 (130, 130)	1960	900	1700 (1800, 1700)	6	2	C + C
Grade IX (EX, CD)	130 (130, 130)	1960	900	1700 (1800, 1700)	6	2	C + C
Grade X (EX, CD)	255 (255, 255)	1960	900	3000 (3100, 3000)	6	2	C + C
Grade XI (EX, CD)	255 (255, 255)	1960	900	3000 (3100, 3000)	6	3	C + C + C
Grade XII (EX, CD)	255 (255, 255)	1960	900	3500 (3600, 3500)	10	2	C + C + C
Grade XIII (EX, CD)	500 (500, 500)	1960	900	7000 (7100, 7000)	10	2	D + D

CD: denotes protection against diamond core drill bits.



CENTURION LW-SR

BURGLARY-RESISTANT LIGHTWEIGHT STRONG ROOMS



KEY FEATURES

- Panels are certified as Grade V by the European Certification Board Security Systems (ECB-S), in accordance with the EN 1143-1 standard.
- Next to the steel reinforcements, the panels contain a newly developed high-strength concrete and wood pieces that allow for a lighter weight and environmentally friendly approach (no use of bitumen or any toxic components).
- Specifically designed to address strong room projects for which a lower floor loading restriction is imposed – such as upstairs or in an historic building, and where standard vaults cannot be installed.
- The very lightweight modular strong room panels reduce transportation costs and facilitate an easy and quick assembly.
- Reduced wall thickness to maximise available space.
- Innovative, ECB-S-certified ventilation system for optimum climate control.
- Optional planar protection.
- Interior finished with primed surface; exterior finished with steel.

PRODUCT SPECIFICATIONS

	Thickness (mm)	Weight kg/m ²
Grade V	80	175



CENTURION LW-VD

BURGLARY-RESISTANT LIGHTWEIGHT VAULT DOORS



KEY FEATURES

- Doors are certified as Grade V and VI by ECB-S, in accordance with the EN 1143-1 standard.
- A new design that offers an exceptional lightweight performance without compromising on burglary resistance.
- The very lightweight door reduces transportation costs and facilitates assembly.
- Seven and thirteen active front bolts (30 x 30 mm) and two relockers.
- Door frames are armoured to provide extra protection.
- The doors are designed to accommodate an alarm system.
- Ergonomic design to optimise simplicity and accessibility for a solution that is user-friendly and easy to operate.
- Optional grill gate available, accessible via a high-security lock that can be opened manually or automatically.
- Door also available as “Door-in-Door” variant with an integrated emergency door, certified as Grade V–VI.
- The Centurion lightweight vault door is the ideal complement to the lightweight Grade V strong room.

PRODUCT SPECIFICATIONS

Model	Door Depth (mm)	Clearance Opening Height (mm)	Clearance Width (mm)	Weight (kg)	Number of active bolts	Number of locks	Lock class
Grade V	90	1960	900	650	7	2	B + B
Grade VI	90	1960	900	650	13	2	C + C



CENTURION LW-DD

BURGLARY-RESISTANT DOOR-IN-DOOR VAULT DOORS



KEY FEATURES

- Combines high resistance with emergency access without any loss of performance or compromising ergonomics.
- Certified by ECB•S and awarded the EN 1143-1 certification for burglary resistance as a grade V and VI.
- Designed to equip strong room or secure area such as jewelry shops, retail sites, luxury workshops.
- This door is the result of the combination of reinforcement composite and new developed high-strength concrete.
- Main door is secured by 7 and 13 active front bolts and 2 relockers.
- Emergency door is secured by 3 active front bolts, 2 active top bolts & 2 bottom bolts.
- Each bolt is 30 x 30 mm.

PRODUCT SPECIFICATIONS

Model	Height (mm)	External Width (mm)	Net Weight, Modular room (kg)	Net Weight, Cast in-situ (kg)	Clear Opening Height (mm)	Clear Opening Width (mm)	Door Thickness (mm)
Grade V	2100	1220	910	670	1960	900	90
Grade VI	2100	1220	960	720	1960	900	90

Dimensions of emergency door (Width x Height): 530 x 620mm



MODULEGUARD VD

BURGLARY-RESISTANT VAULT DOOR



KEY FEATURES

- ModuleGuard security enclosures are certified Grade II–IV by ECB•S in accordance with the EN 1143-1 certification for burglary resistance.
- A range of attack tools were used to test the level of resistance, from basic tools, such as drills and sledgehammers, to more sophisticated thermal and electrical equipment, like the oxyacetylene torch.
- Possible application areas: reinforced protection for cash-counting rooms, archives, storerooms (for weapons, pharmaceuticals), ATMs, etc.
- A series of high-security locking options is available.
- The exterior of the enclosure can be painted or finished with decorative panels. Prepainted or galvanised versions available as an option.

PRODUCT SPECIFICATIONS

Clear Opening Height (mm)	Clear Opening Width (mm)	Thickness (mm)	Net Weight (kg) Grades II & III	Net Weight (kg) Grade IV
2055	750	185	690	780
2055	900	185	830	930
2055	1050	185	970	1090
2055	1200	185	1110	1240
2055	1350	185	1250	1400
2055	1500	185	1380	1550



MODULEGUARD SR

BURGLARY-RESISTANT STRONG ROOMS



KEY FEATURES


- ModuleGuard security enclosures are certified Grade II–IV by ECB•S in accordance with the EN 1143-1 certification for burglary resistance.
- The security enclosures are constructed using modular, lightweight panels.
- The light weight reduces transportation costs, eases installation and allows for placement higher up in buildings where floor loads are limited.
- The modular construction means assembly, disassembly and expansion of a room are both quick and easy.
- The security enclosures can be built into the existing structure of a building and customised to meet the required dimensions.
- Possible applications are: reinforced protection for cash-counting rooms, archives, storerooms (for weapons, pharmaceuticals), ATMs, etc.
- A series of high-security locking options is available.
- The exterior of the enclosure is primed in RAL 7032 and can be finished with decorative panels.

PRODUCT SPECIFICATIONS


Width (mm)	Thickness (mm)	Height (mm)	Net Weight (kg/m ²) Grade II	Net Weight (kg/m ²) Grade III	Net Weight (kg/m ²) Grade IV
300	75	2240	104	108	200
600	75	2240	137	146	242
750	75	2240	171	182	302
900	75	2240	206	219	363

OPTIONAL FITTINGS


ARCHIVE CABINET

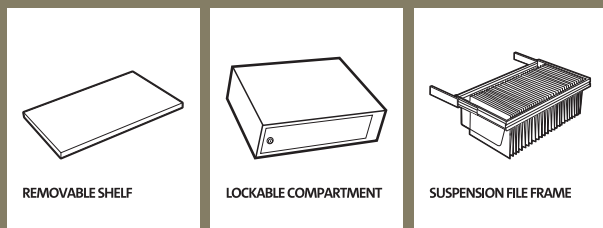


DATAGUARD NT

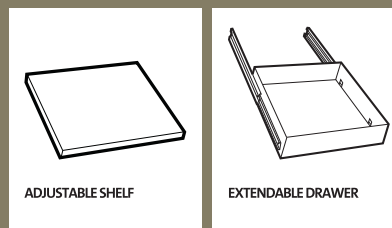


CUSTODIAN

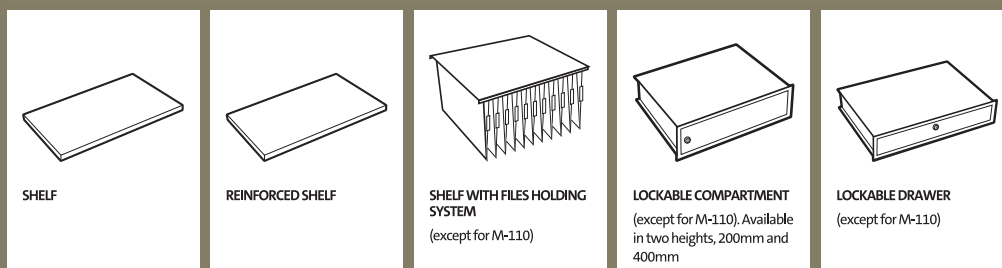


DATAPLUS

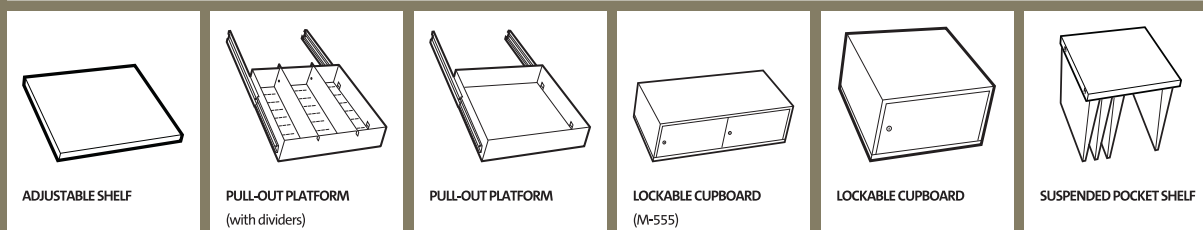







DPC

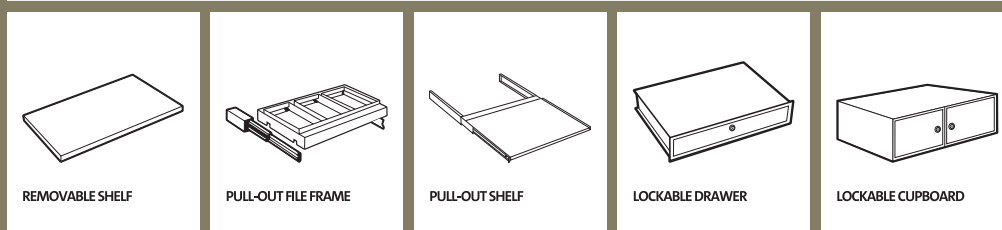



DUOFORCE

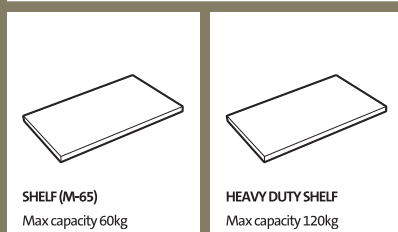



DUOGUARD G0-GII

					
SHELF Max capacity 60kg	HEAVY DUTY SHELF Max capacity 120kg	EXTENDABLE SHELF	EXTENDABLE DRAWER	LOCKABLE COMPARTMENT	SUSPENSION FILE FRAME






EUROPA DEPOSIT

	
RETAINING SHELF	RETAINING CUPBOARD







RHINO MK II

	
REMOVABLE SHELF	EXTENDABLE DRAWER

TRIDENT

				
REMOVABLE SHELF M-110-M-595	REINFORCED SHELF M-110-M-1115	SHELF WITH FILES HOLDING SYSTEM M-170-M-1115	LOCKABLE DRAWER M-170-M-595	LOCKABLE COMPARTMENT M-170-M-415

PROGUARD

					
REMOVABLE SHELF* M-65: 20x375x350 M-120-M-305: 20x475x376 M-365: 20x710x542 M-370: 20x550x400 M-465: 20x550x430	EXTENDABLE SHELF M-120-M-305: 37x455x376 M-370: 37x530x400 M-465: 20x550x430	EXTENSIBLE TRAY M-120-M-305: 37x460x361 M-370: 37x535x385 M-465: 37x535x415	LOCKABLE DRAWER M-120-M-305: 100x460x336 M-370: 100x535x360 M-465: 100x535x390	LOCKABLE COMPARTMENT M-120-M-305: 335x467x358 M-370: 335x562x382 M-465: 335x562x412	EXTENSIBLE FILE FRAME M-120-M-305: 37x460x376 M-370-M-465: 37x535x376

www.chubbsafes.com

Authorised dealer

